



18 INCH MINIMUM BULB REMOVAL CLEARANCE

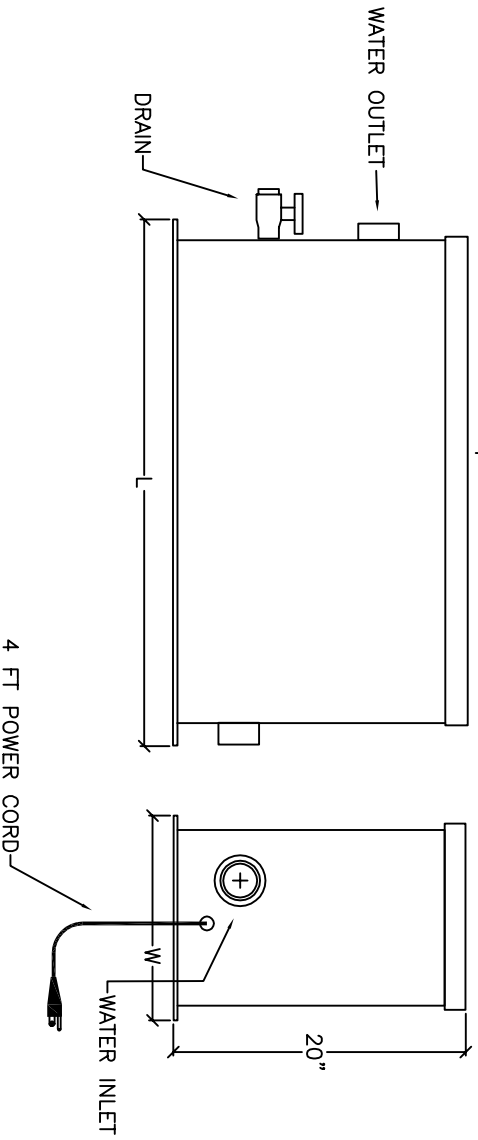

ALCUV SPECIFICATIONS

MODEL NO.	BULB WATTS	NO. OF BULBS	VOLTS	AMPS.	WATTS	L	W	WATER INLET / OUTLET	MAXIMUM WATER FLOW RATE (GPM) AT UV INTENSITY					
									15K	22K	30K	45K	60K	
ALCUV-2	72	2	115	.9	108	14.5"	12.5"	1.5 FPT	50	33	25	17	13	
ALCUV-3	108	3	115	1.8	207	22.5"	14.5"	2 FPT	75	50	37	25	18	
ALCUV-4	144	4	115	1.8	207	29.5"	14.5"	2 FPT	100	66	50	33	25	
ALCUV-6	216	6	115	2.7	310	43.5"	14.5"	2 FPT	150	112	75	56	37	
ALCUV-8	288	8	115	3.6	414	29"	20"	3 FPT	200	150	100	75	50	
ALCUV-10	360	10	115	4.5	517	34"	20"	3 FPT	250	187	125	94	63	
ALCUV-12	432	12	115	5.4	621	40"	20"	3 FPT	300	225	150	112	75	



Aqua Logic, Inc.  
8286 Claremont Mesa Blvd. Suite 302  
San Diego, CA 92111

TITLE: ALCUV-2 THRU 10

LAST UPDATE: 10-19-05 DATE: 9-19-02

FILE: ALCUV Spec

BY: CE